

### CST 55

Dimensions:	56.5mm × 300mm (with bracket) 56.5mm × 210mm (without bracket) <small>Note: the diameter of the bracket base is 70mm</small>
Voltage:	24V DC (Positive and negative logic)
Connection:	Cable included
Light:	LED permanent
Sound:	Pulse
Life duration:	50,000 hrs

## CST 55 Signal Tower — Safe, Compact, Reliable



**Servo Dynamics Sdn Bhd**  
17, Solok Kekabu 1,  
Permatang Damar Laut,  
11960 Bayan Lepas,  
Penang, Malaysia

Tel : 04-626 6388  
e-mail : [support@servo.com.my](mailto:support@servo.com.my)  
[www.servo.com.my](http://www.servo.com.my)

COMPLETE SET  
INCLUDING STANDARD  
MOUNTING BRACKET  
AND CABLE


360 ° STRONG  
VISIBILITY  
FROM ALL  
THE POSITION

CLEARLY  
IDENTIFY  
THE SIGNAL  
BY UP TO  
85 dB PULSE  
TONE

2-4 TIERS PLUS  
BUZZER AS OPTION  
MATCH MAJORITY  
APPLICATION

INDUSTRIAL  
DESIGN LOOK  
MATCH MODERN  
MACHINE  
APPEARANCE

The transparent dome and grey base of CST 55 make it suitable for any modern machine. The transparent dome can reduce the interference of ambient light, which not only improves the quality but guarantees production safety. CST 55 also adds a model including a complete set (standard mounting bracket and a cable), which can improve customer experience and reduce assembly time and cost.

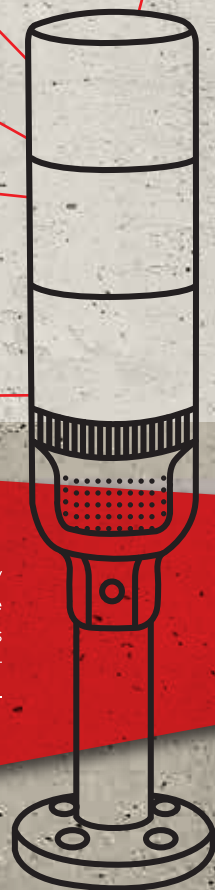

## CST 55 Signal Tower



### Order specifications:

#### Tube mounting with bracket

GN/YE/RD	659 110 55
GN/RD	659 120 55
BU/GN/YE/RD	659 150 55

#### Tube mounting with bracket

GN/YE/RD/Buzzer	659 310 55
GN/RD/Buzzer	659 320 55
BU/GN/YE/RD/Buzzer	659 350 55

#### Tube mounting without bracket


GN/YE/RD	659 210 55
GN/RD	659 220 55
BU/GN/YE/RD	659 250 55

#### Tube mounting without bracket

GN/YE/RD/Buzzer	659 410 55
GN/RD/Buzzer	659 420 55
BU/GN/YE/RD/Buzzer	659 450 55

### Accessories:

Base with integrated tube (Ø25mm, 110mm long, Plastic, incl. rubber seal)	960 009 16
Tube with cable gland, Ø25mm	
100mm	975 849 10
250mm	975 849 25
400mm	975 849 40
800mm	975 849 80
Base for tube mounting (Ø25mm, plastic, incl. rubber seal)	960 009 15
Foldaway base for tube mounting (Match Ø 25mm aluminium tube, incl. rubber seal)	960 009 13



**Servo Dynamics Sdn Bhd**

17, Solok Kekabu 1,  
Permatang Damar Laut,  
11960 Bayan Lepas,  
Penang, Malaysia

Tel : 04-626 6388

e-mail : support@servo.com.my

www.servo.com.my